



**Kerala Co-operative Milk Marketing Federation Limited**  
**Cattle Feed Plant, Malampuzha P.O., Palakkad-678 651**

Tel: 0491-2815107, 2815170, e-mail: cfm@milma.com

CFP-M/PRODN/2020

19.11.2020

**TENDER NOTICE**

Sir,

Sub: - Enquiry for extension of roof over elevator pit.

Sealed quotations are invited from experienced contractors for the following works.

**SCOPE OF WORK**

Roof extension over elevator pit as per the drawing attached.

**SCHEDULE OF QUANTITIES**

As per annexure attached.

**PRICE**

Prices quoted by the Party shall be firm and fixed during the entire period of contract and shall not be subject to any variation or escalation whatsoever on any account.

The prices quoted shall be for Cattle Feed Plant, Malampuzha, including supply of all required items, labour charges, consumables, all taxes and duties, insurance charges, unloading/loading charges etc. at site.

**PAYMENT TERMS**

40% Payment will be released against the material supply, 50% against the completion of the work, 10% will be released after the guarantee period of one year. The details of measurement and bill shall be submitted after completion of work.

**GAURENTEE**

The work should be guaranteed for the materials and workmanship for a period of one year from the date of completion.

**EMD**

The tenderer shall furnish, as part of their bid, an amount of Rs. **5000/-** (Rupees five thousand only) as EMD, in the form of Cash or Demand Draft drawn in favour of the Manager, Cattle Feed Plant, Malampuzha, Palakkad., payable at SBT, Palakkad or at Canara Bank, Malampuzha. No interest shall be paid by the Cattle Feed Plant on the EMD deposited by the tenderer.

Unsuccessful tenderer's EMD will be discharged/returned as promptly as possible as but not later than 30 days after the expiry of the prescribed period of the bid validity. The successful tenderer's EMD will be discharged upon the tenderer furnishing the security deposit, as specified.

The EMD may be forfeited if tenderer withdraws his bid during the period of validity of the Bid.



## GENERAL CONDITIONS

1. Applicable statutory deductions like GST, income tax, sales tax, EPF/ ESI, Work contract tax, etc. shall be effected while settling bills. The contractors must remit ESI/EPF for the work and for their employees should produce proof of remittance to avoid the ESI cutting while submitting the bills. Submit the Chellan as the proof of remittance along with bills, for considering release of payment. Without the ESI/EPF remittance proof payments will be released only after cutting the ESI/EPF from the bills.
2. All essential materials required for the work shall be brought to the site before commencing the work. Specifications shall be as mentioned in the schedule of quantities. In case for clarification, our Engineer shall be contacted before taking up the particular work.
3. The quantities and items of works mentioned in the schedule are tentative. Manager reserves the right to place work order for part of the schedule, depending upon the financial implications. Payment shall be effected only for those quantities actually executed at site.
4. The materials shall be inspected by our engineers before acceptance. The materials shall be of our approved make as per the schedule.
5. Each item of work shall be approved prior to commencement of the next work.
6. The contractor shall arrange for all compliance to the ESI/PF rules in force. Cattle Feed Plant shall not be liable for any benefits/compensation to the workers engaged by the contractor, in the event of accidents/mishaps etc. during execution of work. The contractor shall provide suitable safety measures to their Workers and also the plant raw materials stored in that area in case of any emergency like rain/ wind etc.
7. The contractor or his workmen shall not interfere in any activity of the Plant and/or cause any damages to buildings/property. The entry of all such laborers will be on the basis of gate pass, which will have to be arranged by the Contractor prior to starting the work. In the event of any damage to Cattle Feed Plant's property, the contractor alone shall be liable.
8. Income tax, ESI and other applicable statutory deductions shall be affected while settling bills.
9. The plant day to day activities should not be affected during the course of work.
10. The work found inferior in quality/ bad workmanship the same shall be redone at contractor's risk and cost.
11. The work found inferior in quality/ bad workmanship the same shall be redone at contractor's risk and cost.

## TERMS AND CONDITIONS

12. The contractor shall provide all the material required for the works.
13. The contractor shall supply tools and tackles required for the works.
14. The entire works shall be completed within 20 days from the date receipt of the order.
15. All the works shall be carried out as per the directions of our plant engineer.
16. The contractor shall guarantee to rectify any defect noticed in works due to bad workmanship within one year from the date of completion of the work.
17. All safety measures shall be taken for the work like including safety belts, scaffolding's etc. work permit shall be taken before the commencement of work. All risk shall be covered by contractor as per norms.  
The sealed superscribed offer must be submitted on or before 26.11.2020, 02.00 pm to the Manager, Cattle feed plant, Malampuzha, and will be opened at 2.30 P.M. on the same day.

The undersigned reserves the right to accept any or reject all the quotations without assigning any reason.

Thanking you,

  
MANAGER



- To,
1. All notice boards.
  2. Panchayath Office.
  3. Milma website.
  4. Canara Bank.
  5. Milma Dairy, Kalleppully.



**Details of the extension of roof over elevator pit**

Sl.No	Item Description	No	L	B	H	Co eff.	Qty	Total Qty.	Unit	Rate	Amount
	Roofing Work										
1	Supply, fabricate and erect in position structural steel work for trusses, purlins, girder, column, rafters, strus, wind ties, floor tie beam, structural members for strew box, site cladding, platform etc. as per design including riveting, welding in rolled steel sections and plates with all necessary nuts, bolts, rivets, gusset plates etc. complete including painting with two coat of red oxide primer and two coat of synthetic enamel paint of approved make finished to even shade as per technical specifications.										
	Base plate	40	0.2	0.2		47	75.36				
	Bracing (75x75x6 mm Angle)	16	4.3			6.8	467.84				
	Monkey ladder	2	5.5			15	165				
	<b>Total</b>						<b>708.2</b>	<b>710</b>	<b>Kg</b>		
2	Providing fabricate and erect in position MS pipe / MS square hollow sections work for trusses, purlin, rafter etc. including riveting , welding in rolled steel sections and plates with all necessary nuts, bolts, rivets, gusset plate etc. complete including painting with two coat of red oxide primer and two coat of synthetic enamel paint of approved make finished to even shade.										
	Sheet area 1 (includes tiles, rafter, purlin)	1	3.8	3.8		11	158.84				
	Post(150x100x6.3) hollow section	4	7			23	652.4				
	Tie beam(100x50x4)	4	2.6			8.6	89.34				
	Cladding sections	4	2.6	7		5	364				
	Plat form sections main side sections(100x50x4)	4	2.6			8.6	89.34				
	Distributors(100x50x4)	2	2.6			8.6	44.67				
	60x60x3.2mm	4	2.6			5.5	57.2				
	<b>Total</b>						<b>1455.78</b>	<b>1460</b>	<b>Kg</b>		
3	Providing and fixing 0.5 mm thick meta colour/ poly steel sheets (galvaloom or equivalent) with necessary poly propylene washers self trapping screws etc. for roofing.										
	Roof sheet	1	3.8	3.8			14.44				
	Sheet cladding	4	2.6	7			72.8				
	<b>Total</b>						<b>87.24</b>	<b>90</b>	<b>Sq.m</b>		
4	Accessories(Corner sheet) providing and fixing meta colour sheet roofing accessories such as rain water gutter, ridge etc.	4	7	1			28				
	<b>Total</b>						<b>28</b>	<b>28</b>	<b>Rm</b>		
5	Providing and fixing roof light sheets										
	Side cladding	4	2	1.1			8.8				
	<b>Total</b>						<b>8.8</b>	<b>9</b>	<b>Sq.m</b>		



**DEPUTY ENGINEER  
KCMF LTD.  
CATTLE FEED PLANT  
MALAMPUZHA-678 651**



6	Providing and fixing MS chequered plates including painting with two coat of red oxide primer and two coat of synthetic enamel paint of approved make finished to even shade as per technical specification.									
	For platform(6mm thick)above 26 meter height.	1	2.4	2.4		55	316.8			
	<b>Total</b>						<b>316.8</b>	<b>320</b>	<b>Kg</b>	
	<b>Miscellaneous work</b>									
7	Dismantling carefully the existing sheeted roof with MS structural members over the existing plant above 26 meter height and stacking the same within the site.	1	2.6	2.6			6.76			
	<b>Total</b>						<b>8</b>	<b>8</b>	<b>Sq.m</b>	
									<b>GST</b>	
									<b>GRAND TOTAL</b>	



**DEPUTY ENGINEER  
KCMMF LTD.  
CATTLE FEED PLANT  
MALAMPUZHA-678 651**

DEPUTY ENGINEER  
KCMMF LTD.  
CATTLE FEED PLANT  
MALAMPUZHA-678 651




80X40mm SQ HOLLOW SECTION AS RAFTER

0.5mm THK GALVALUME RIDGE SHEET

60x40 mm sq Hollow sec. as purlin 800-900c/c

80x40x3.2 ms hc sec as tie beam

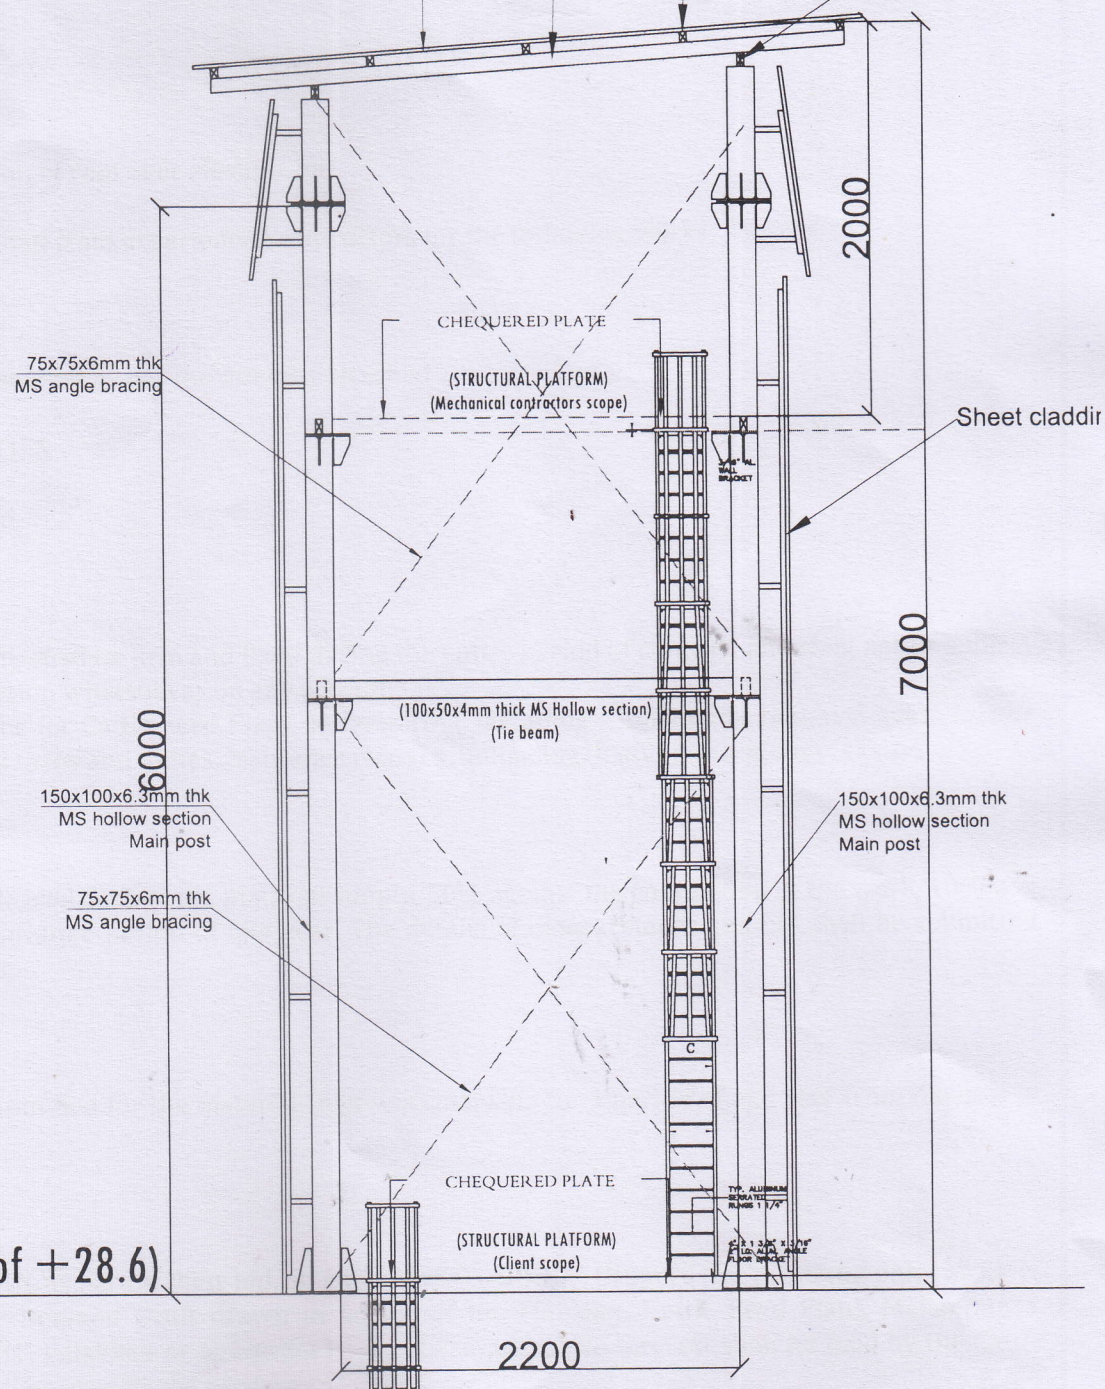

Existing roof +28.6)

DEPUTY ENGINEER  
KCMMF LTD.  
CATTLE FEED PLANT  
MALAMPUZHA-678 651